

# iC55


# KATO




Multifunction monitor shows fuel, DEF tank, rpm, and voltage



Easily accessible filters, DEF tank and battery

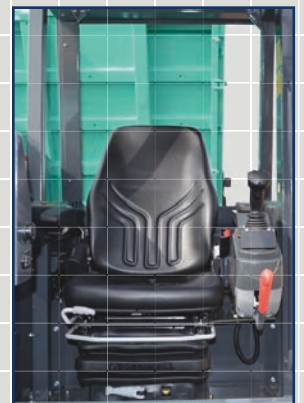

Standard with ROPS/TOPS Canopy and joystick controlled functions

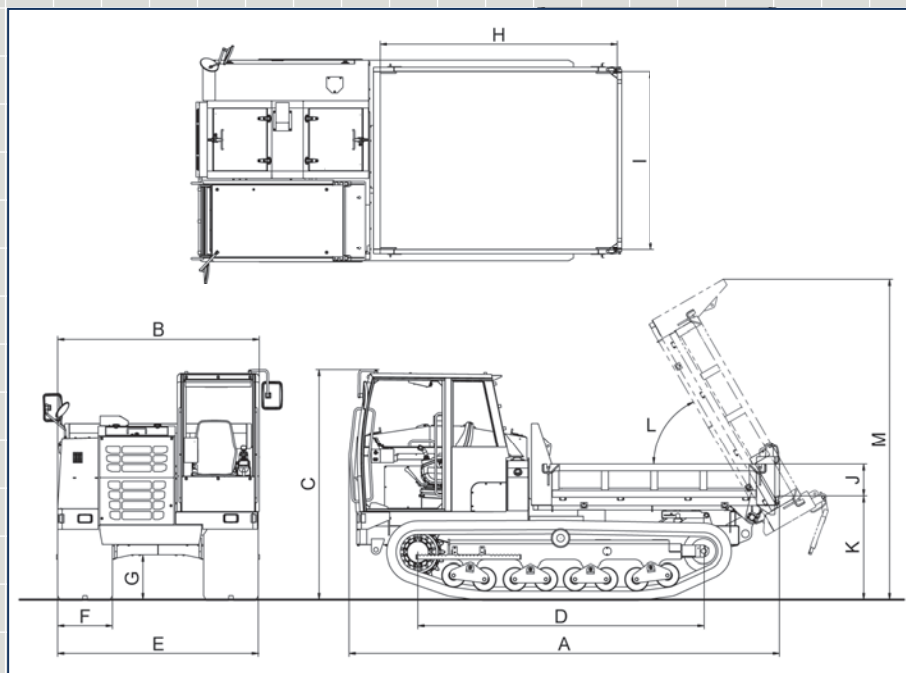

## Dimensions

A	Overall length	15'6"
B	Overall width	7'3"
C	Overall height	8'4"
D	Tumbler center distance	1'3"
E	Overall crawler width	12'4"
F	Crawler width	2'
G	Minimum height from ground	1'7.5"
H	Vessel length	8'6"
I	Inner vessel width	6'5"
J	Vessel height	1'2"
K	Vessel floor height from ground	3'9"
L	Maximum dumping angle	60°
M	Maximum height in dumping	11'6"

## IC55 Specifications

Weight	Transport Weight (Cabin/Canopy)	14,595 lbs./14,198 lbs.
	Payload	11,023 lbs.
Ground Pressure	Empty Cabin/Canopy	3.34/3.25 psi
	Loaded Cabin/Canopy	5.9/5.28 psi
Travel Speed	Low Speed	6.2 mph
	High Speed	7.5 mph
Gradeability		20°
Dimensions	Total Length	15'6"
	Total Width	7'3"
	Total Height	8'4"
Engine	Model	Kubota V3800 TIER 4 Final
	Type	4 Cycle Water Cooled Diesel
	No. of Cylinders	4 Cylinder
	Rated Output	105 hp @ 2400 rpm
	Maximum Torque	84/1500 rpm
	Fuel Consumption	6.38 gph
	Fuel Tank Capacity	39.7 gals
	Starting Motor	12V-3.0 kW
	Battery	12V-72 Ah
	Alternator	12V-960 W
	Regulator	IC type
	Oil Capacity	4.8 gals
	Coolant	4.0 gal (Engine 1.1 )
Crawler	Tumbler Center Distance	10'3"
	Crawler Carrier Total Width	7'3"
	Crawler Width	2'0"
Min. Ground Clearance	19.5"	
Vessel Capacity	Level	2.35 yds. <sup>3</sup>
	Heaped	3.92 yds. <sup>3</sup>
Vessel Internal		
Dimensions	Length	8'6"
	Width	6'5"
	Height	14"
Standard Vessel	Flatbed 3-Way Opening Vessel	
Driving System	HST	
Change Speed System	2 Speed Motor	
Braking System	HST Brake + Parking Brake	

# ic55

## Options

- Boat-shaped scoop-end vessel
- Fully Enclosed ROPS Cabin
- Heater
- Air Conditioning
- Brush guard package
- Digger Derricks
- Cranes
- Flat Bed
- Tanks
- Personal Carrier

## Standard Equipment

- ROPS Canopy
- Flatbed 3-way opening vessel